


Design Criteria accordance with the following condition:

- Minimum Concrete Grade 35 N/mm²
- Bulk Density of soil backfill 17.30 kN/m³
- Surcharge of 610mm maximum with 30° slope (Figure 1)
- Angle of internal friction of soil backfill to be 30°

Product Advantages:

- Easily to install and dismantle
- Reliable quality control with factory manufacturing conditions
- Maintenance-free
- Enable unloading from transportation
- Easily assemble by unskilled labour

PRECAST DWF UNIT

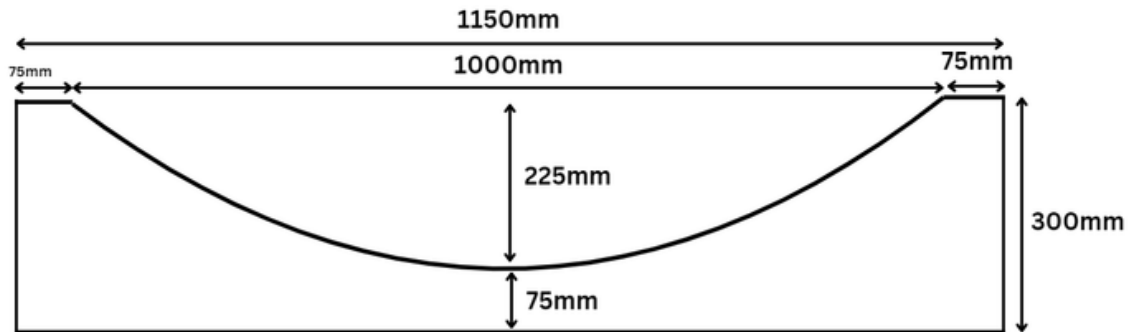

STANDARD DIMENSION

H mm	L mm	D mm	T mm	Weight(±) tonne
1200	1100	150	100	0.55
1800	1550	250	150	1.10
1950	2100	300	150	1.30
3200	2450	450	200	2.70

* Standard length = 1000mm



*The above measurements are based on standard measuring methods. Actual sizes may vary slightly.
*Our company reserves the right to modify the above sizes without prior notice.

